

Fig. 2

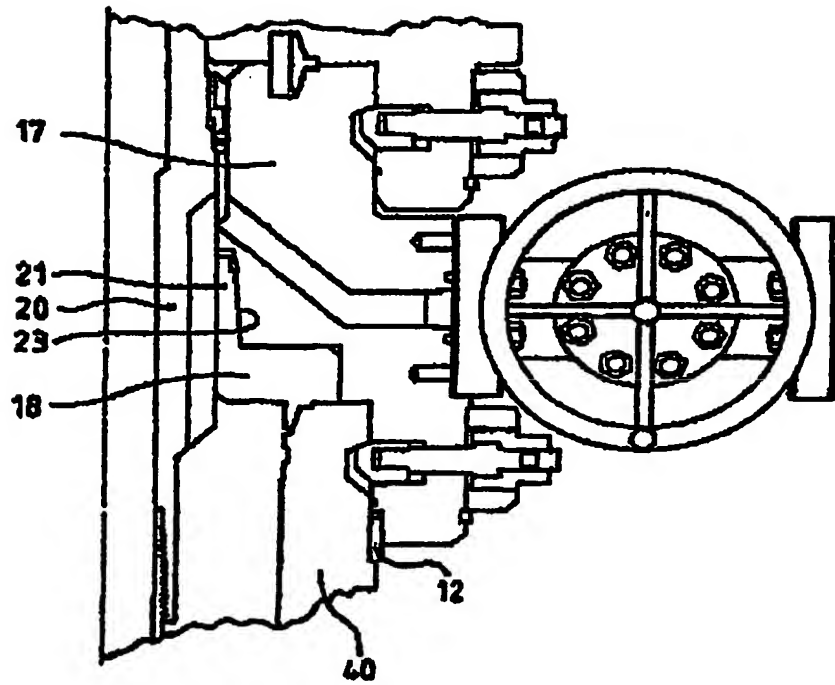
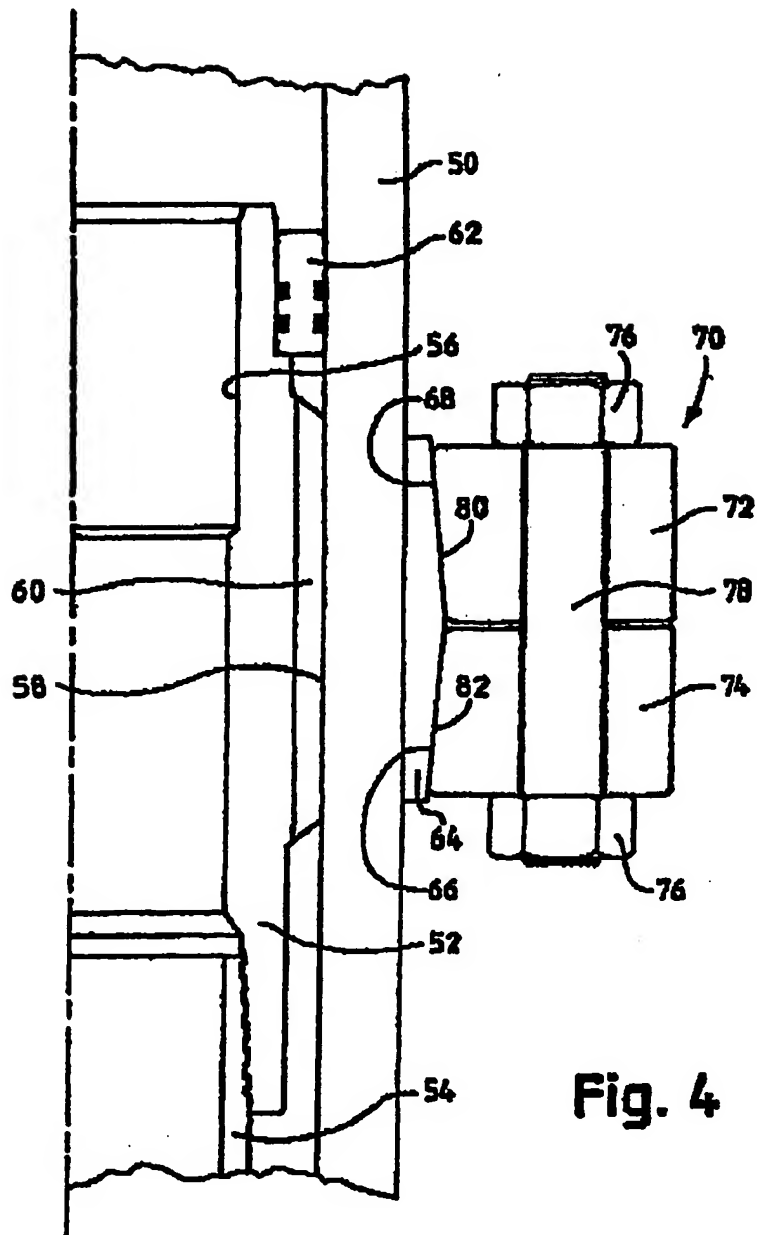
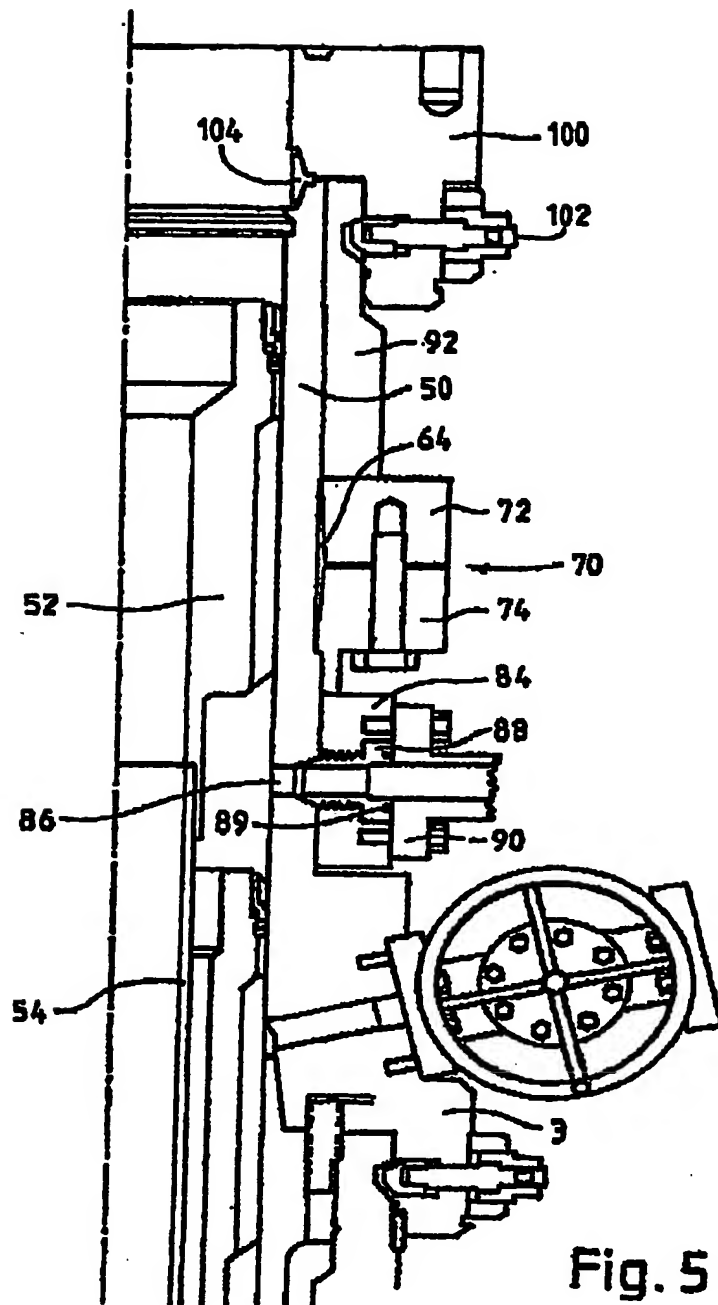
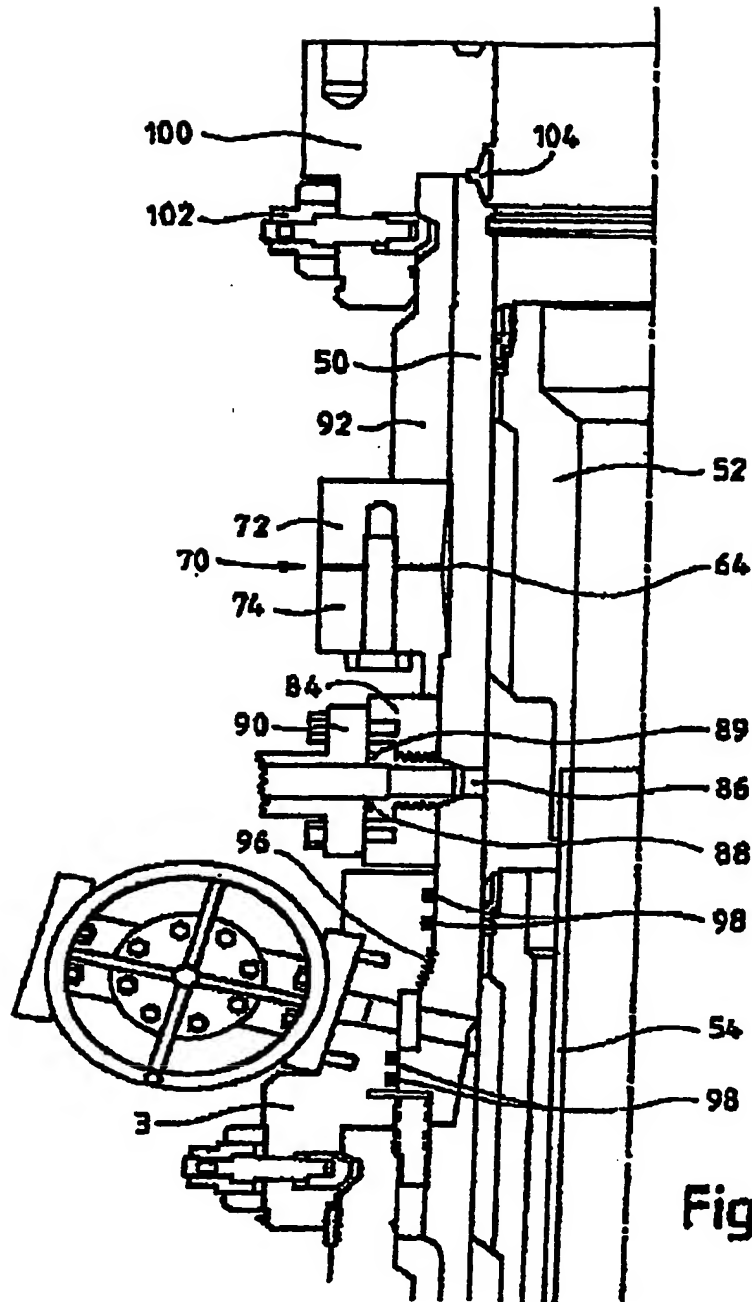


Fig. 3

**Fig. 4**





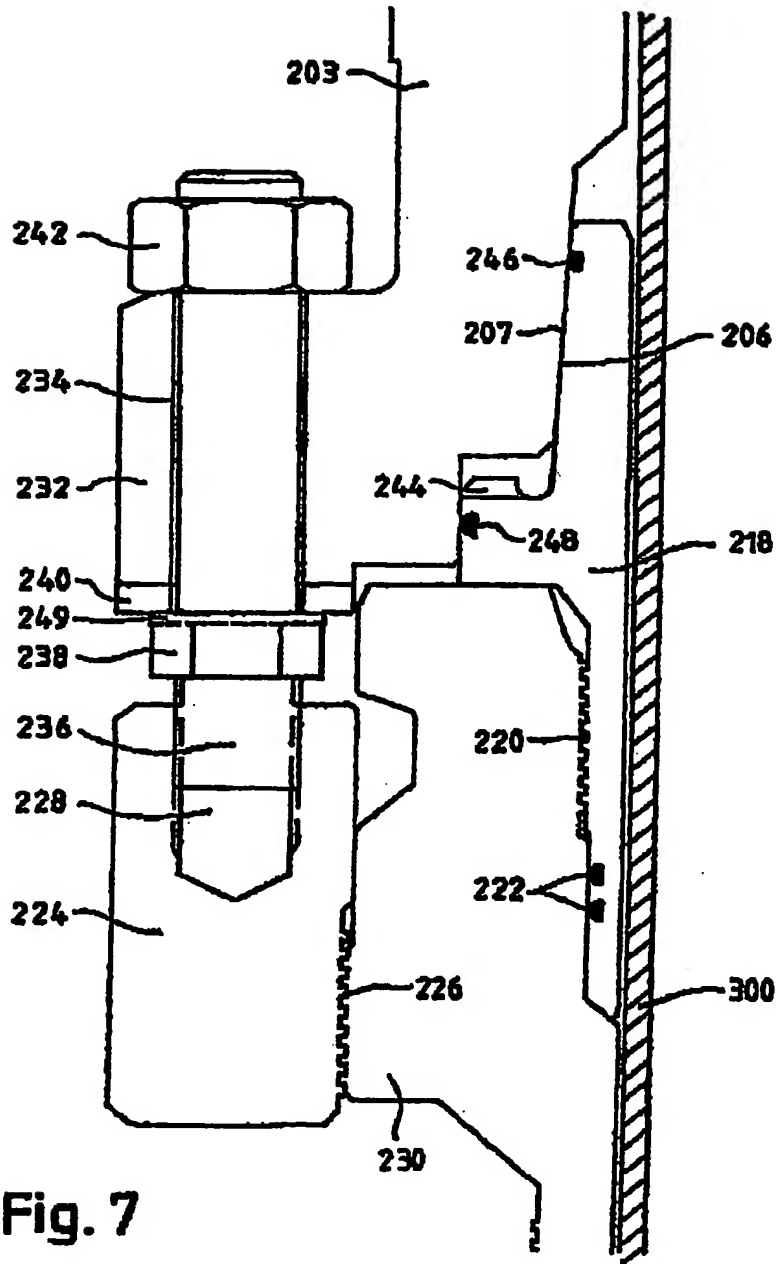
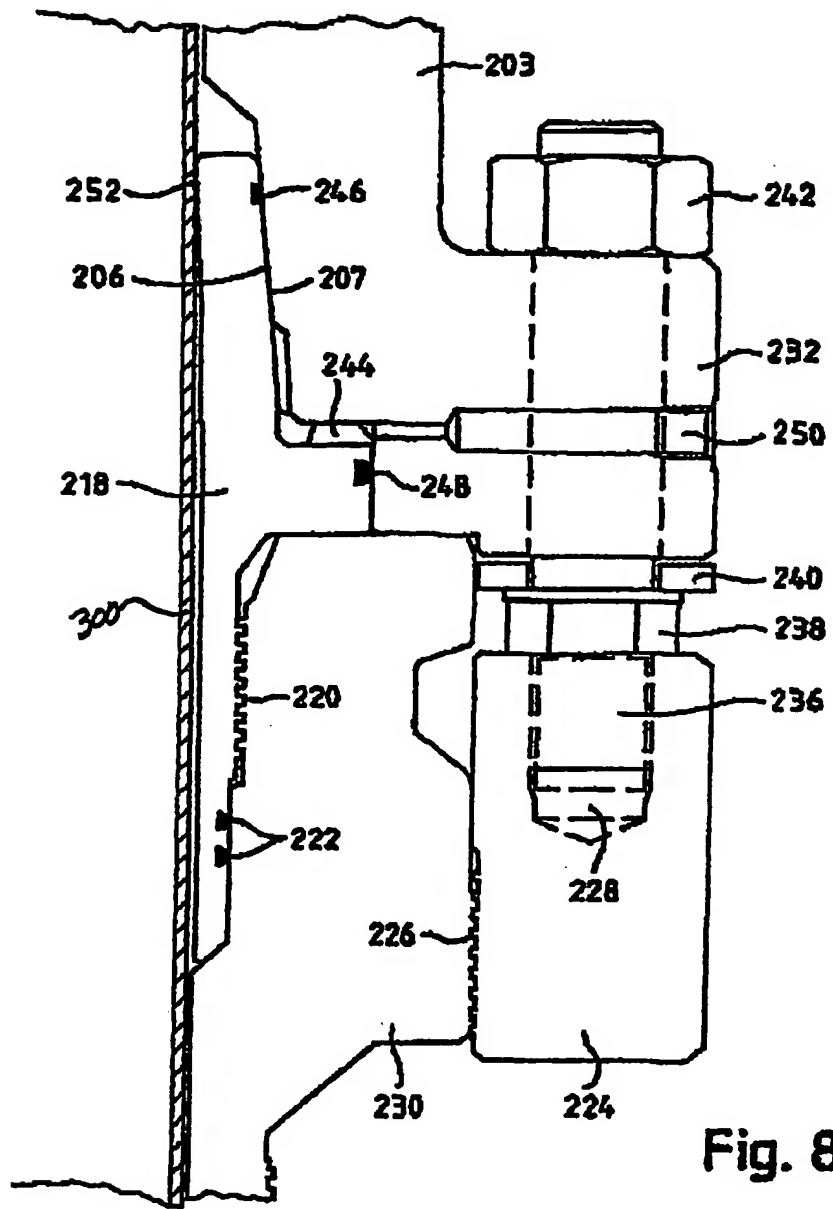
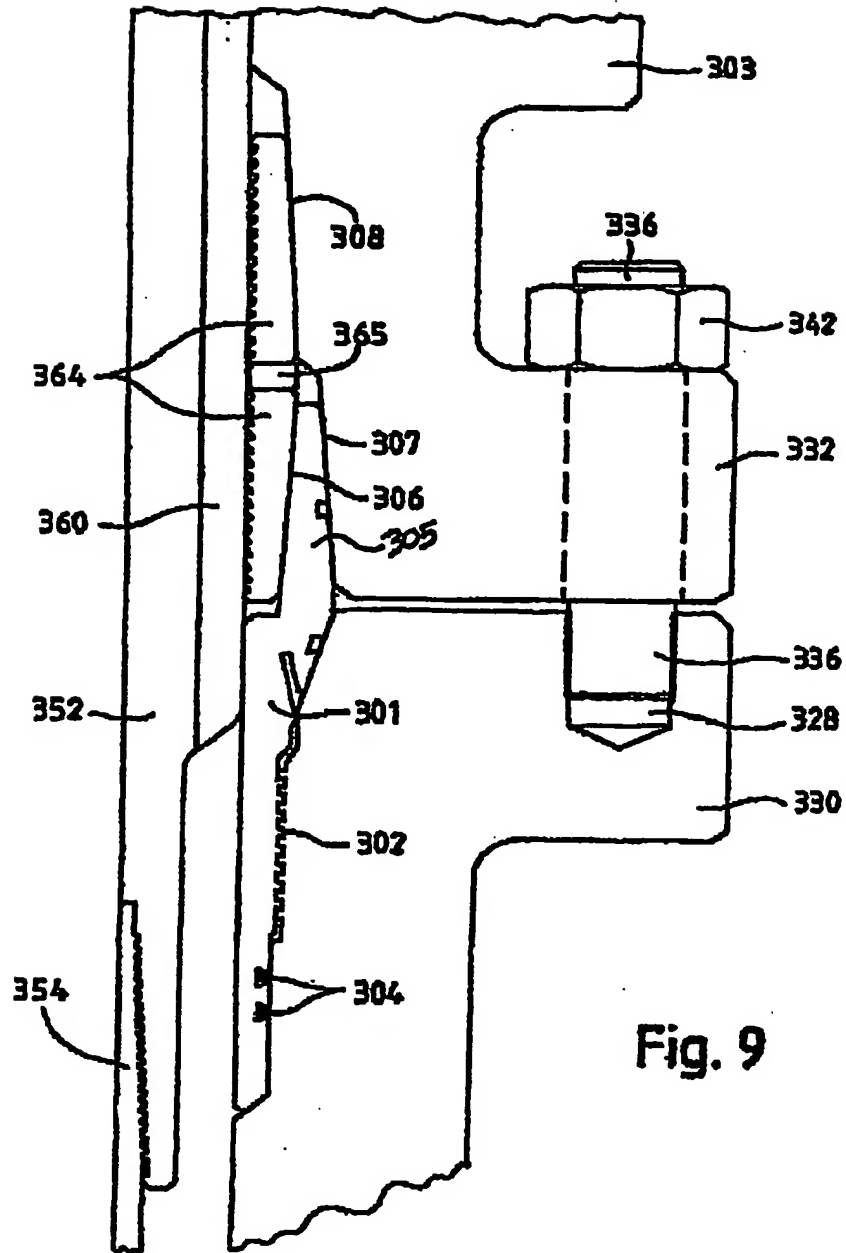


Fig. 7





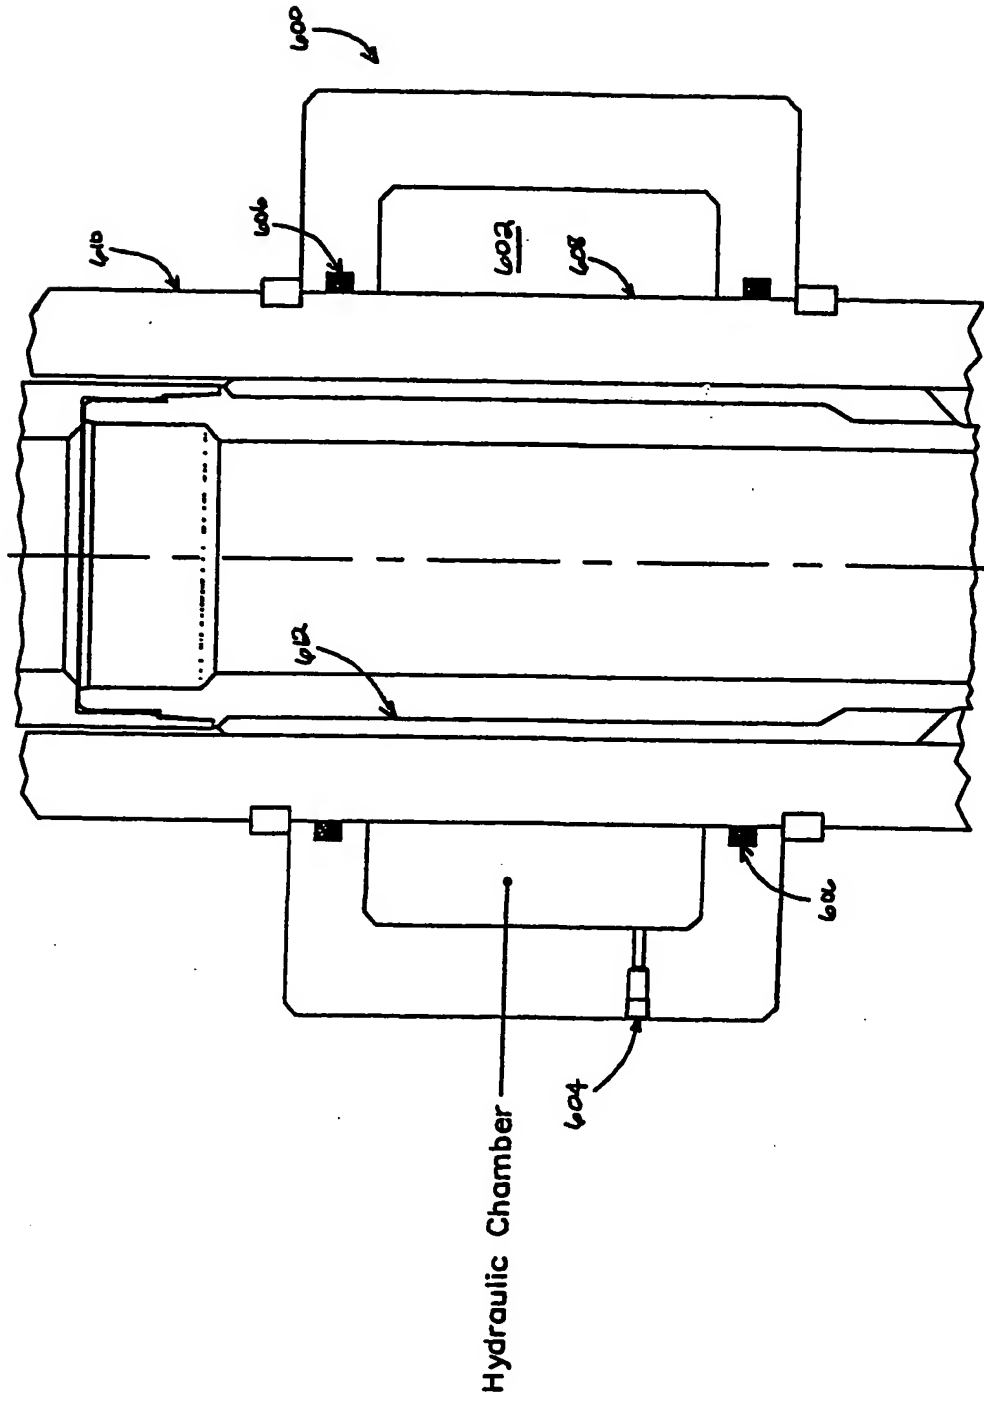


Fig. 10

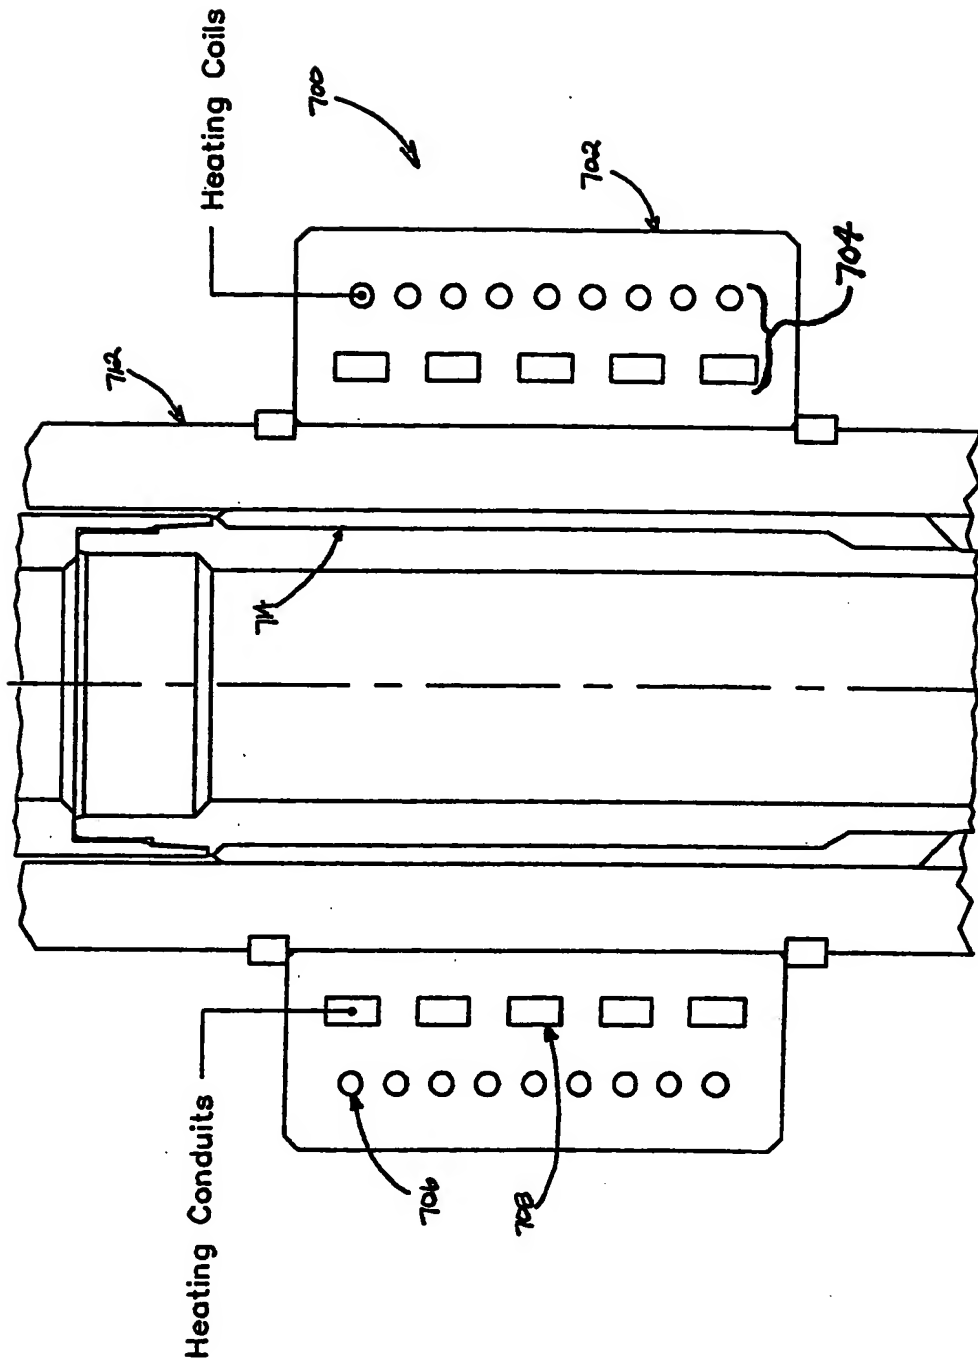


Fig. 11

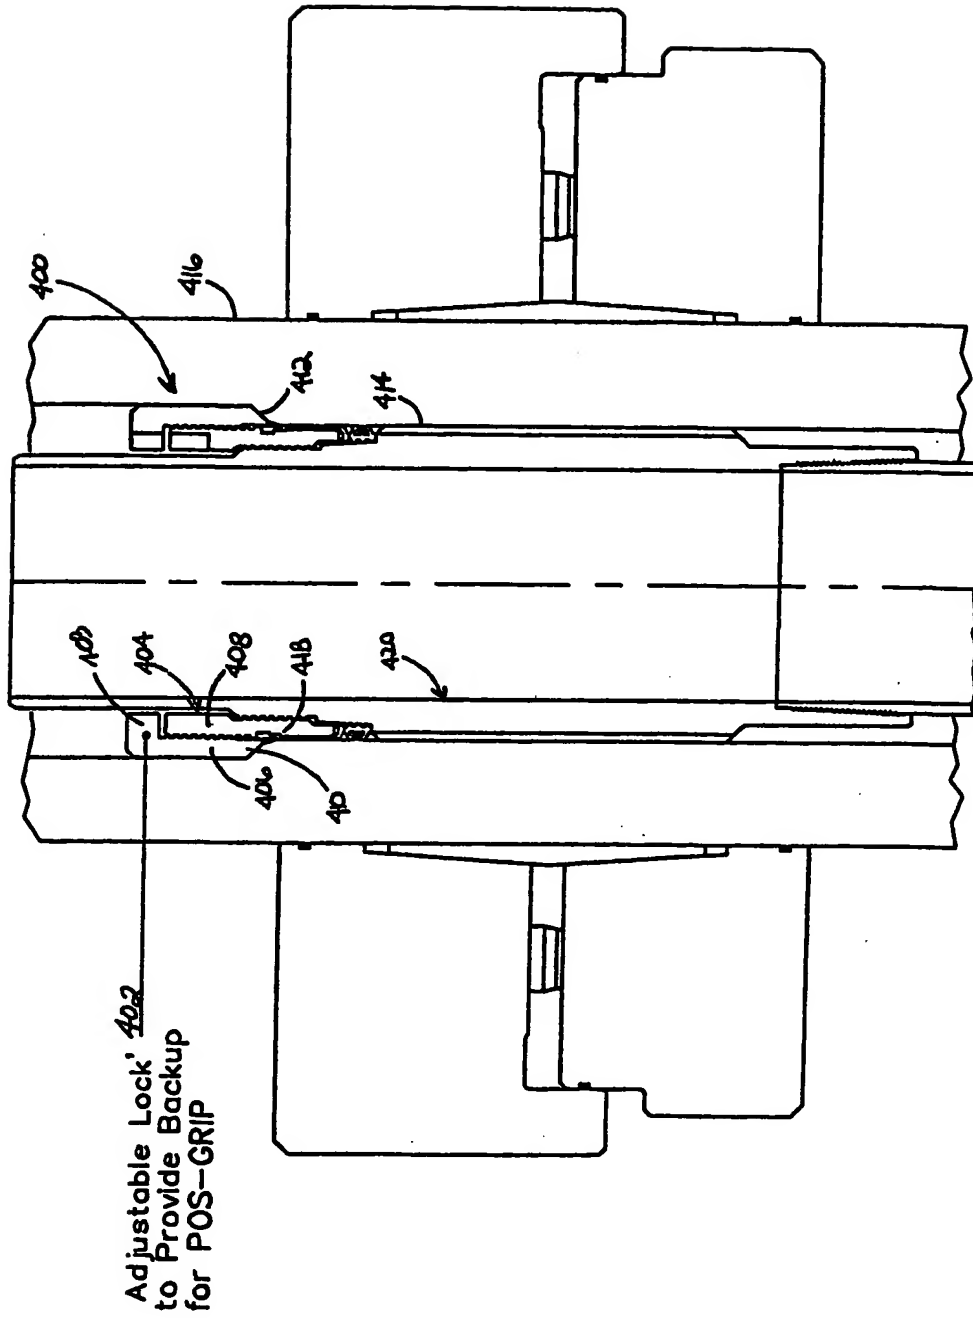


Fig. 12

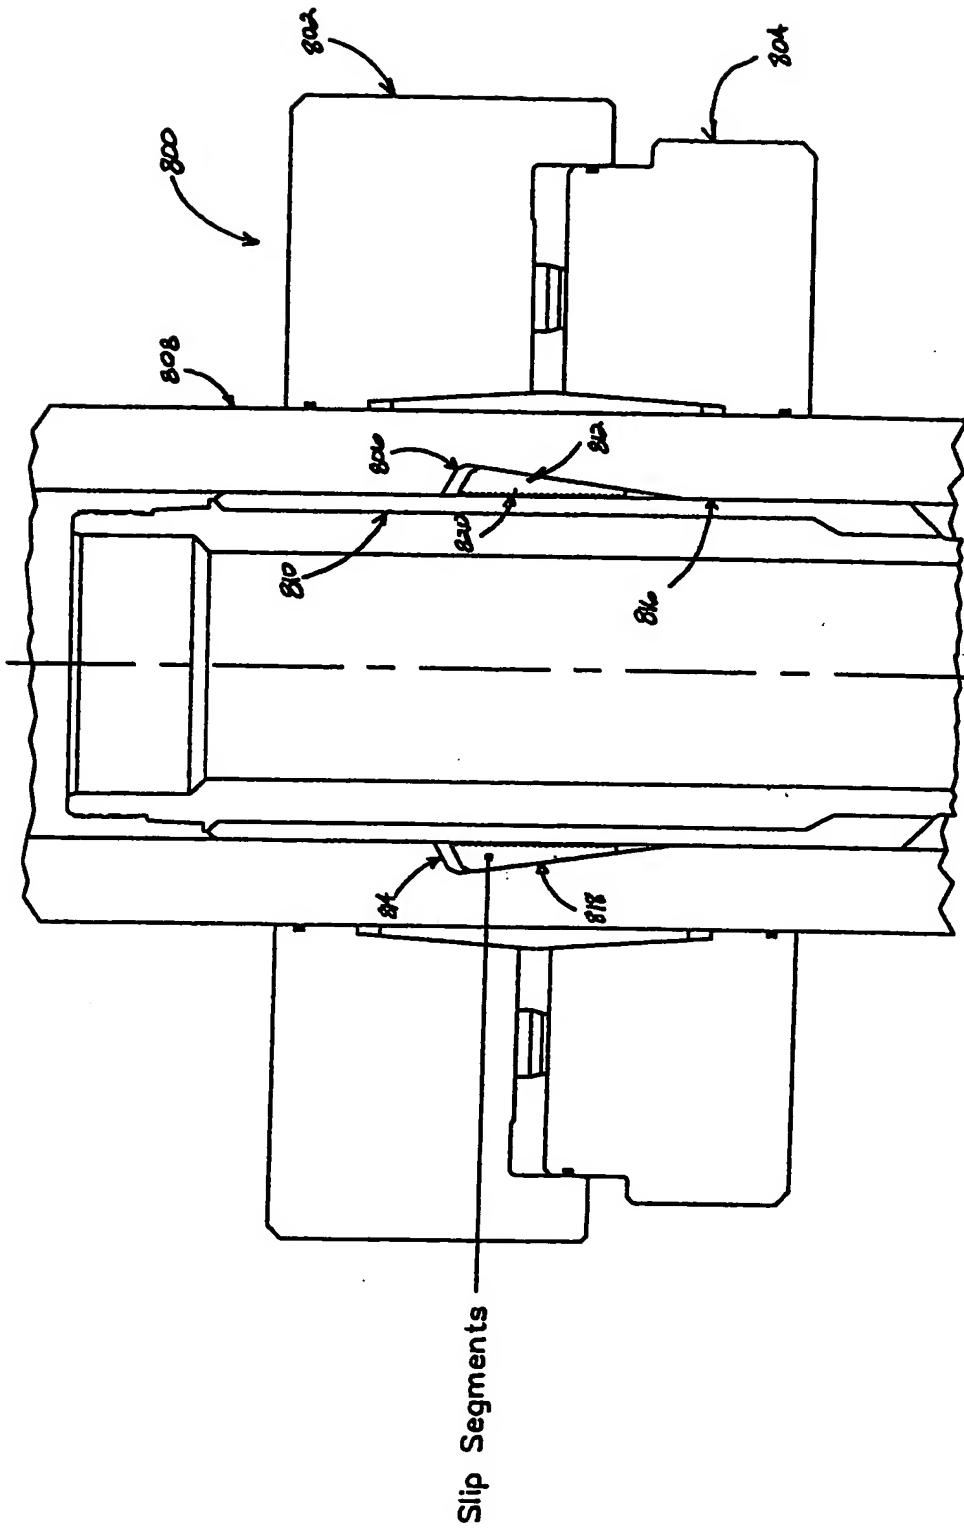


Fig. 13


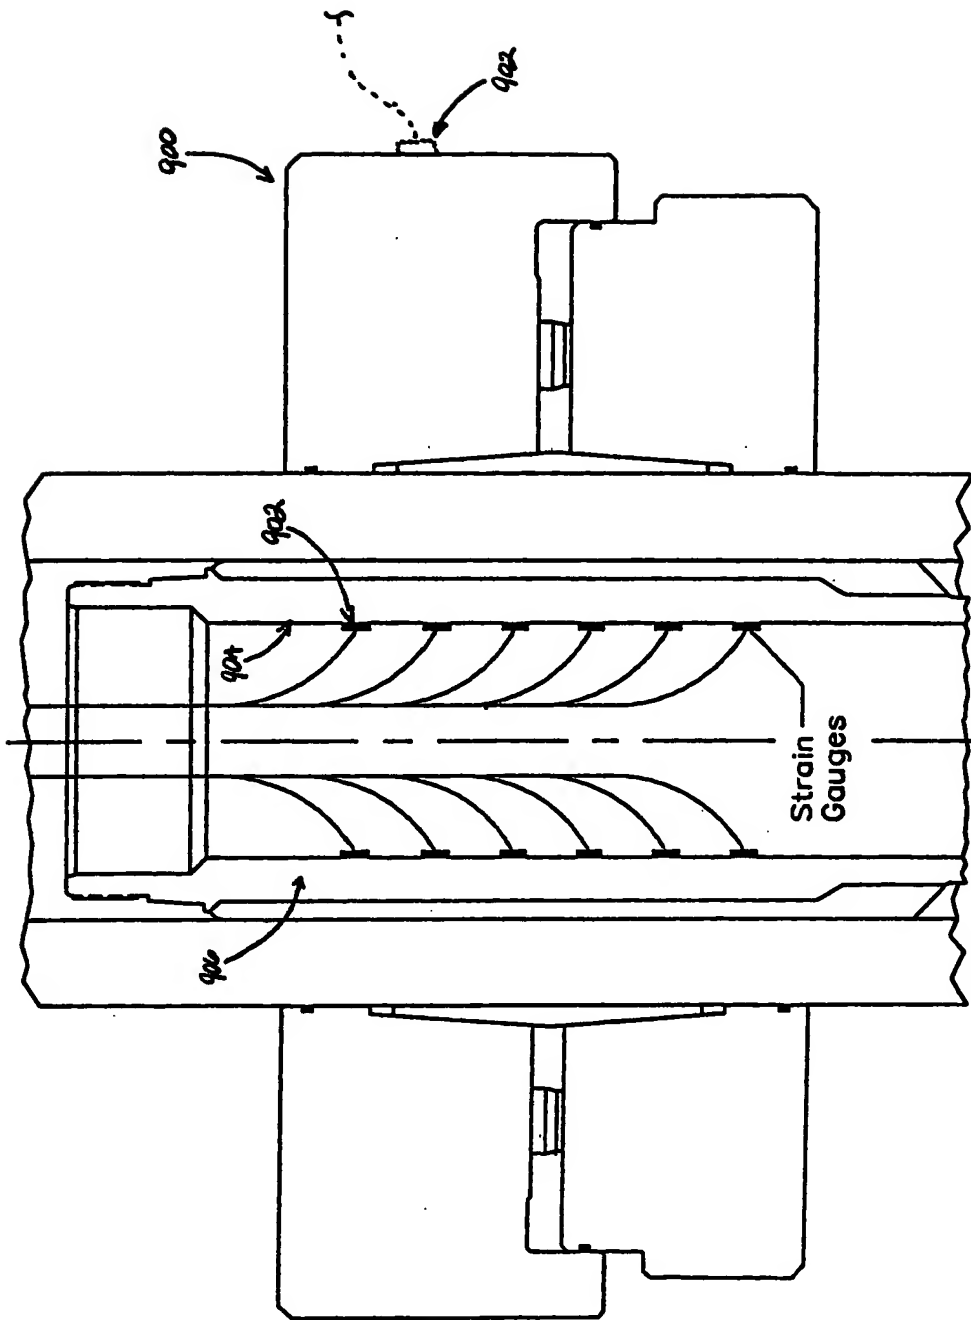


Fig. 14

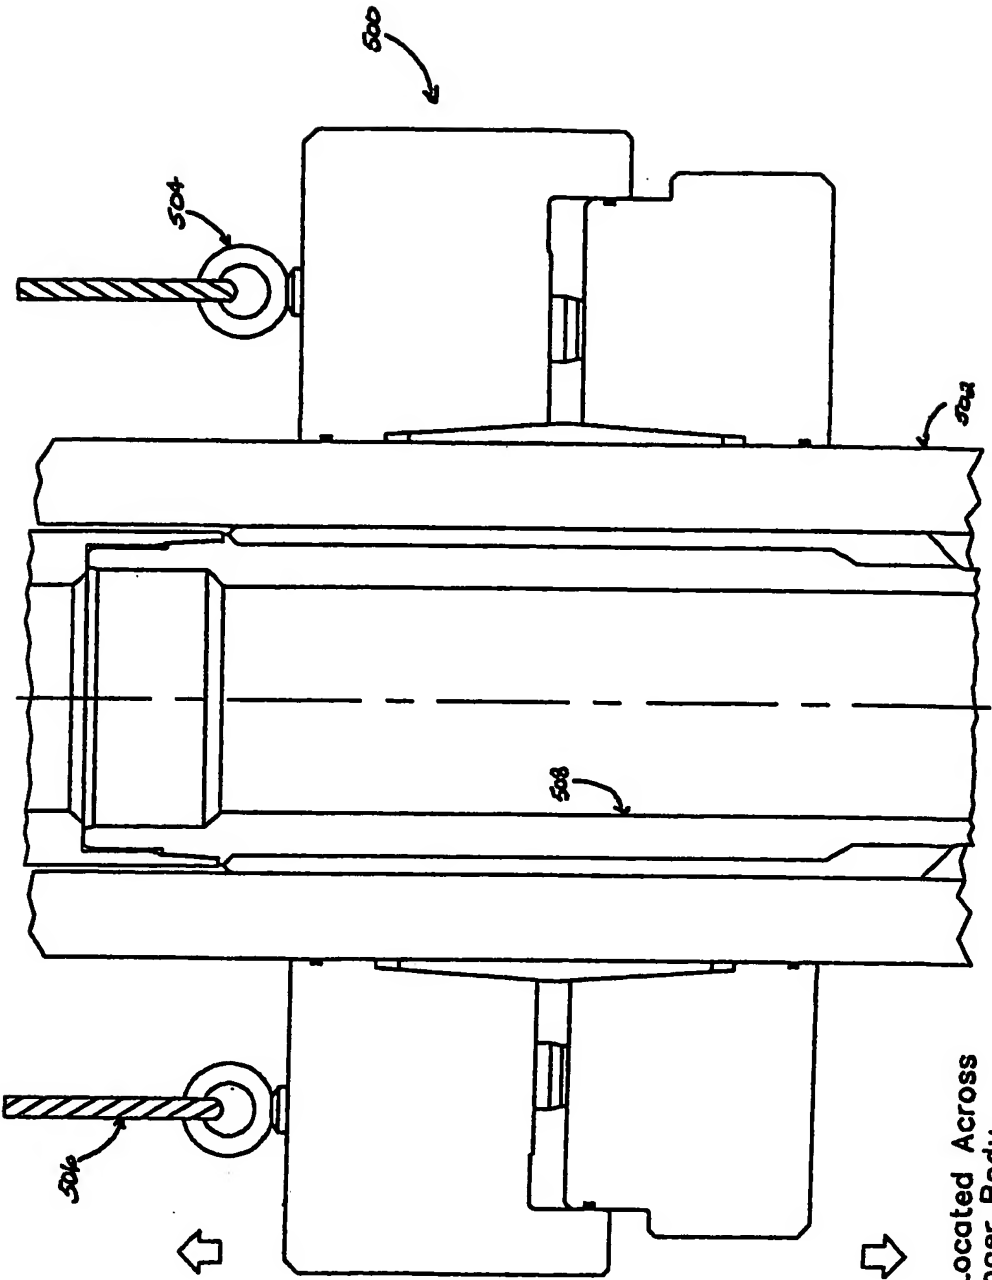

Can be Located Across  
Inner Hanger Body

Fig. 15

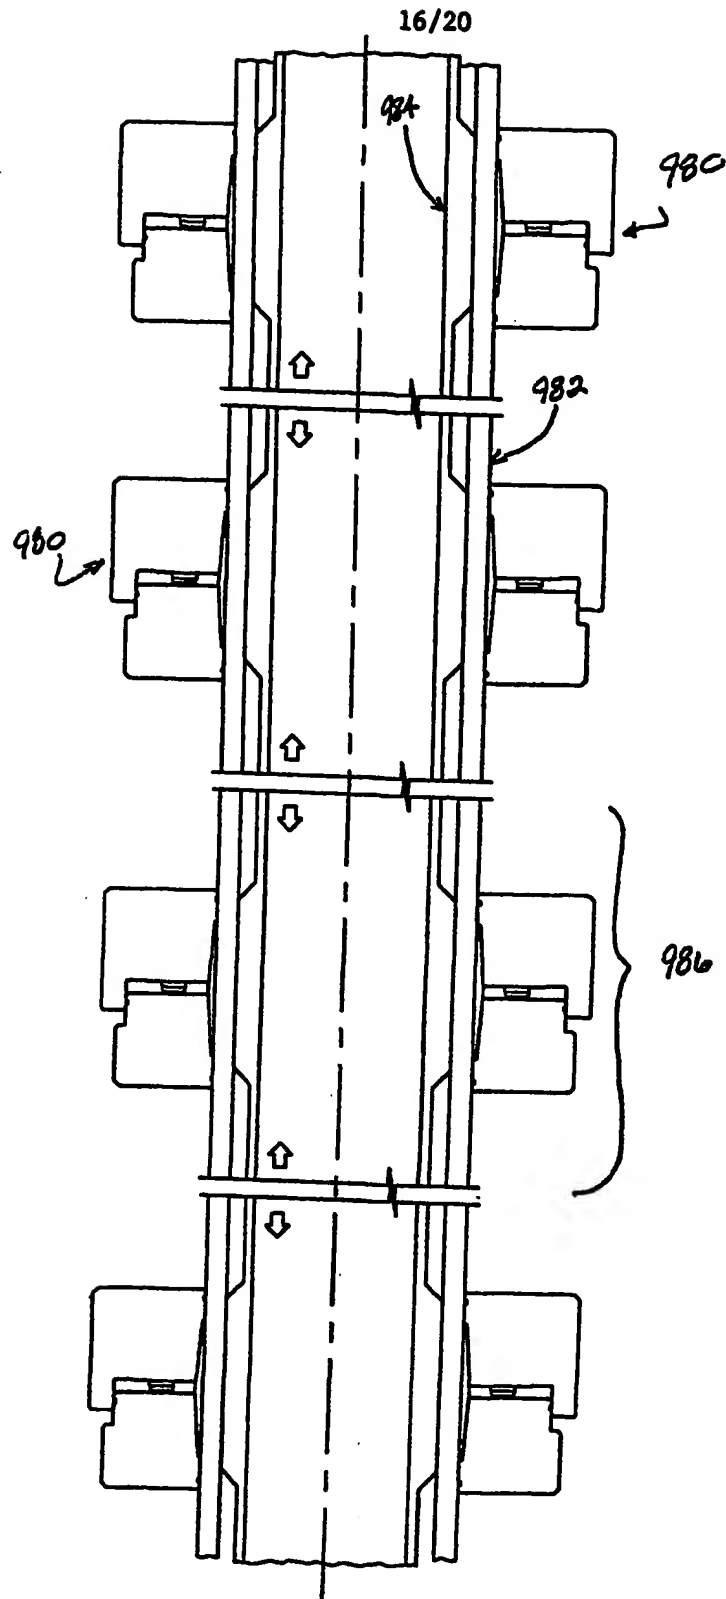
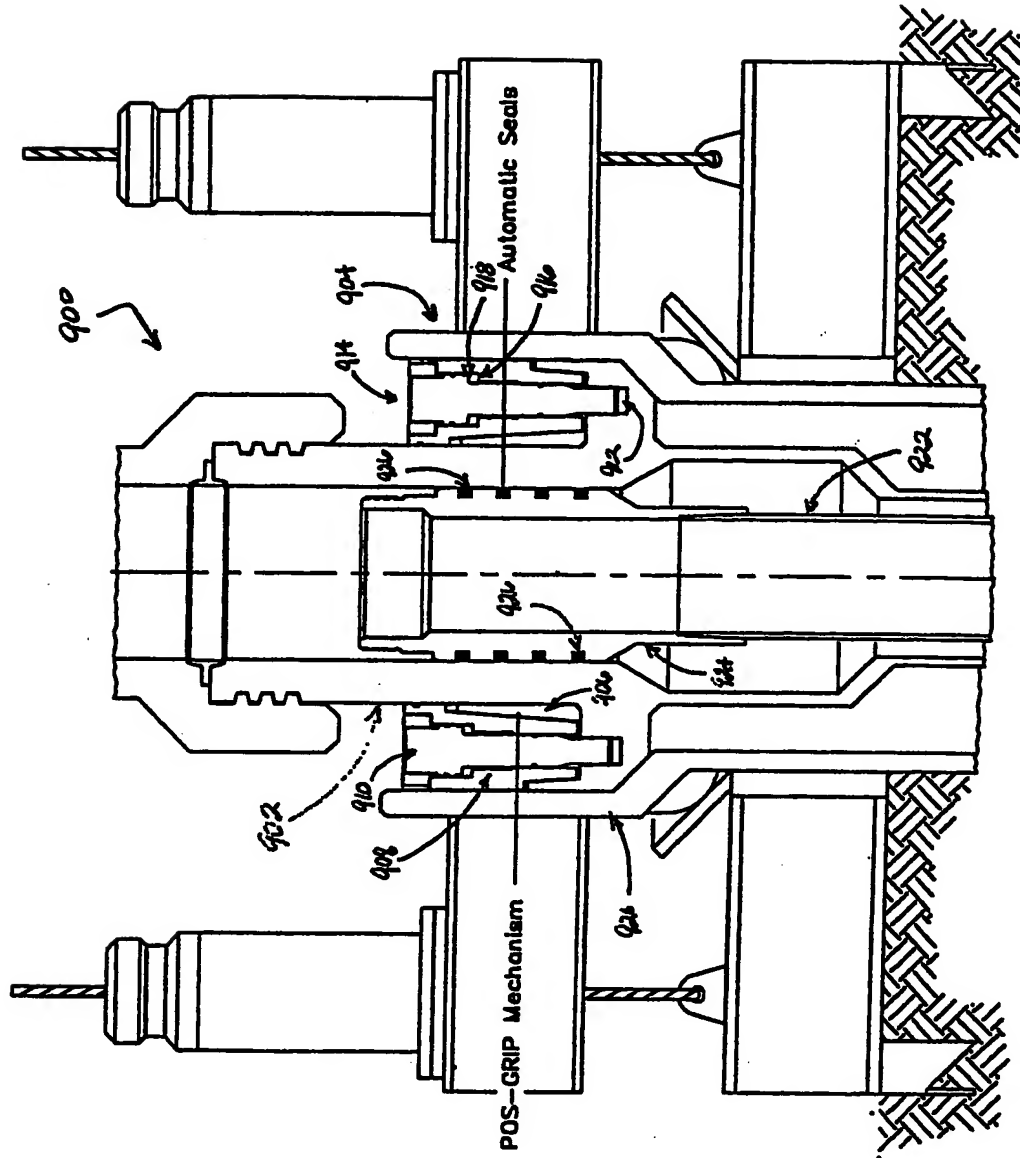


Fig. 16

POS-GRIP Embodiment - Multiple Tension Riser System

Fig. 17



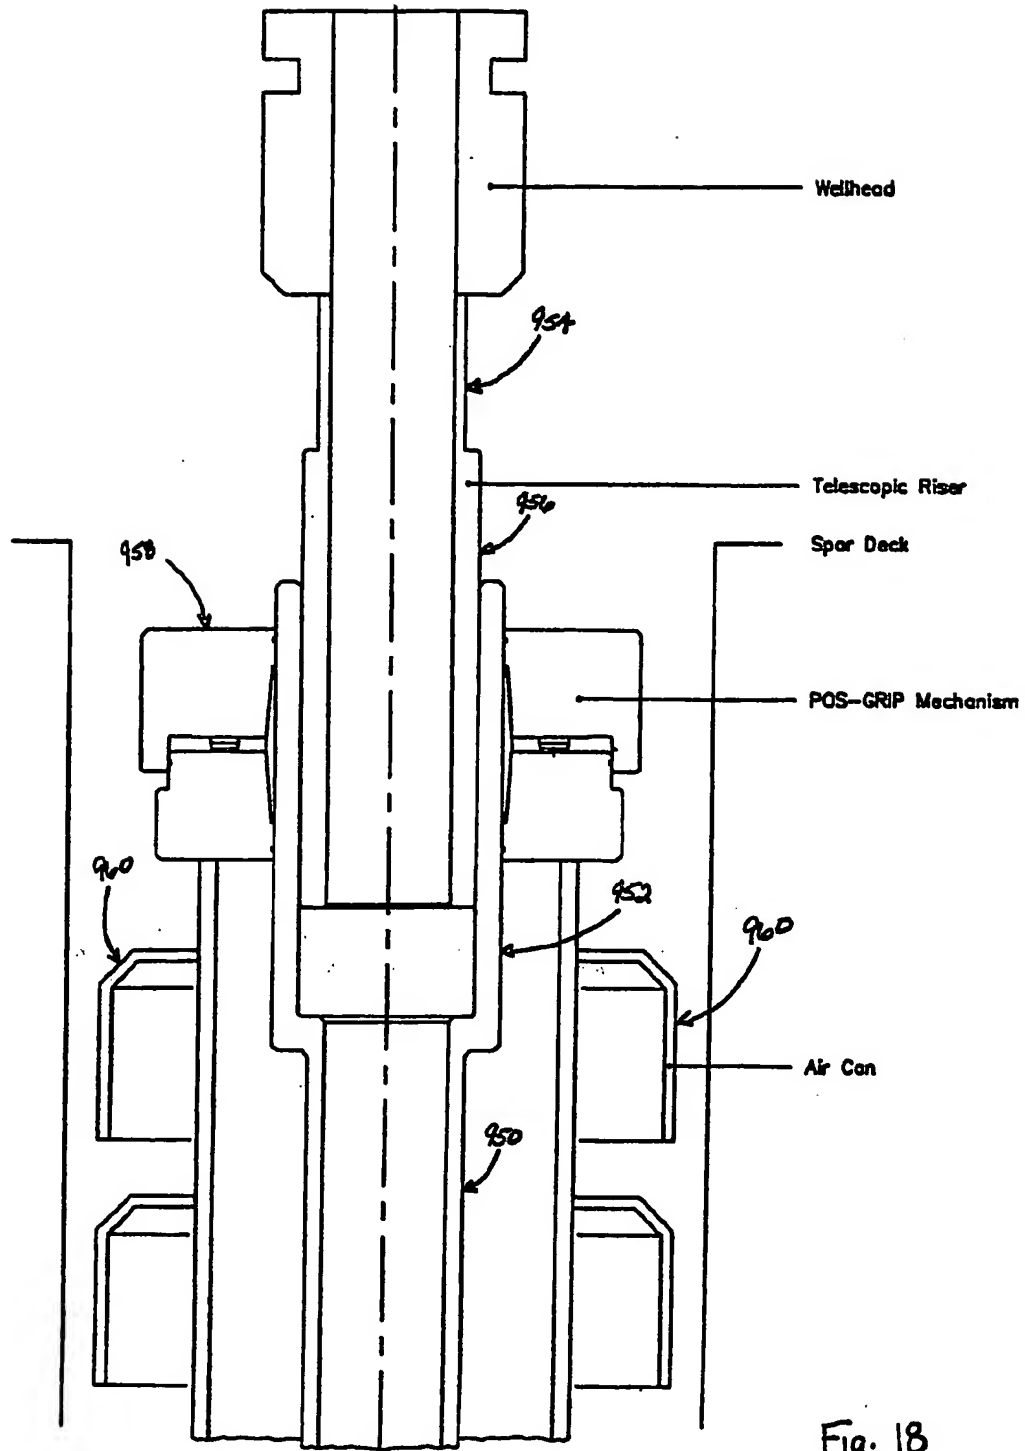


Fig. 18

Note: Pos-Grip is continuous element  
Slips are 4 segments

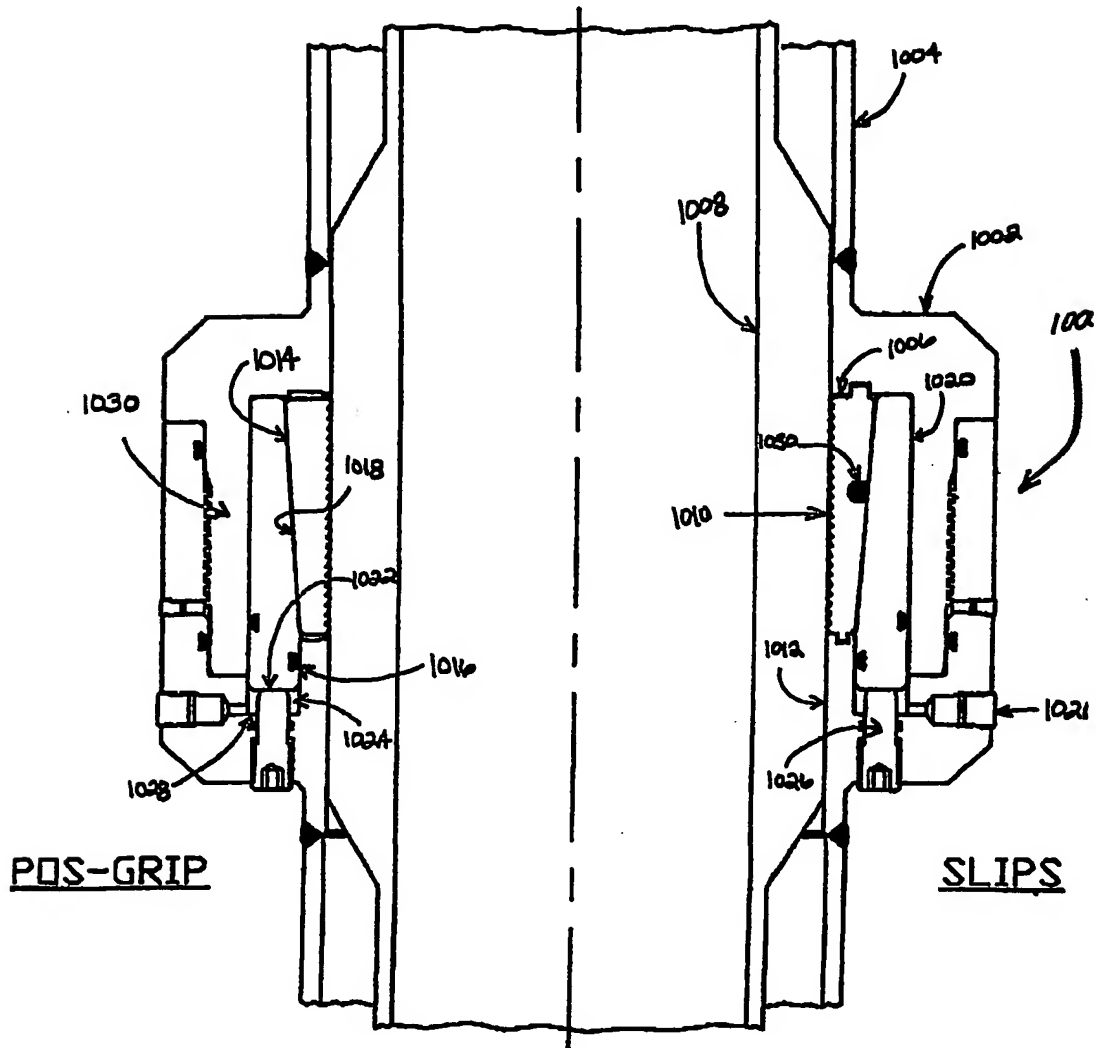


Fig. 19

Dual String System - Slotted Wellhead H using  
1/4" Slots @ 7.5 degrees

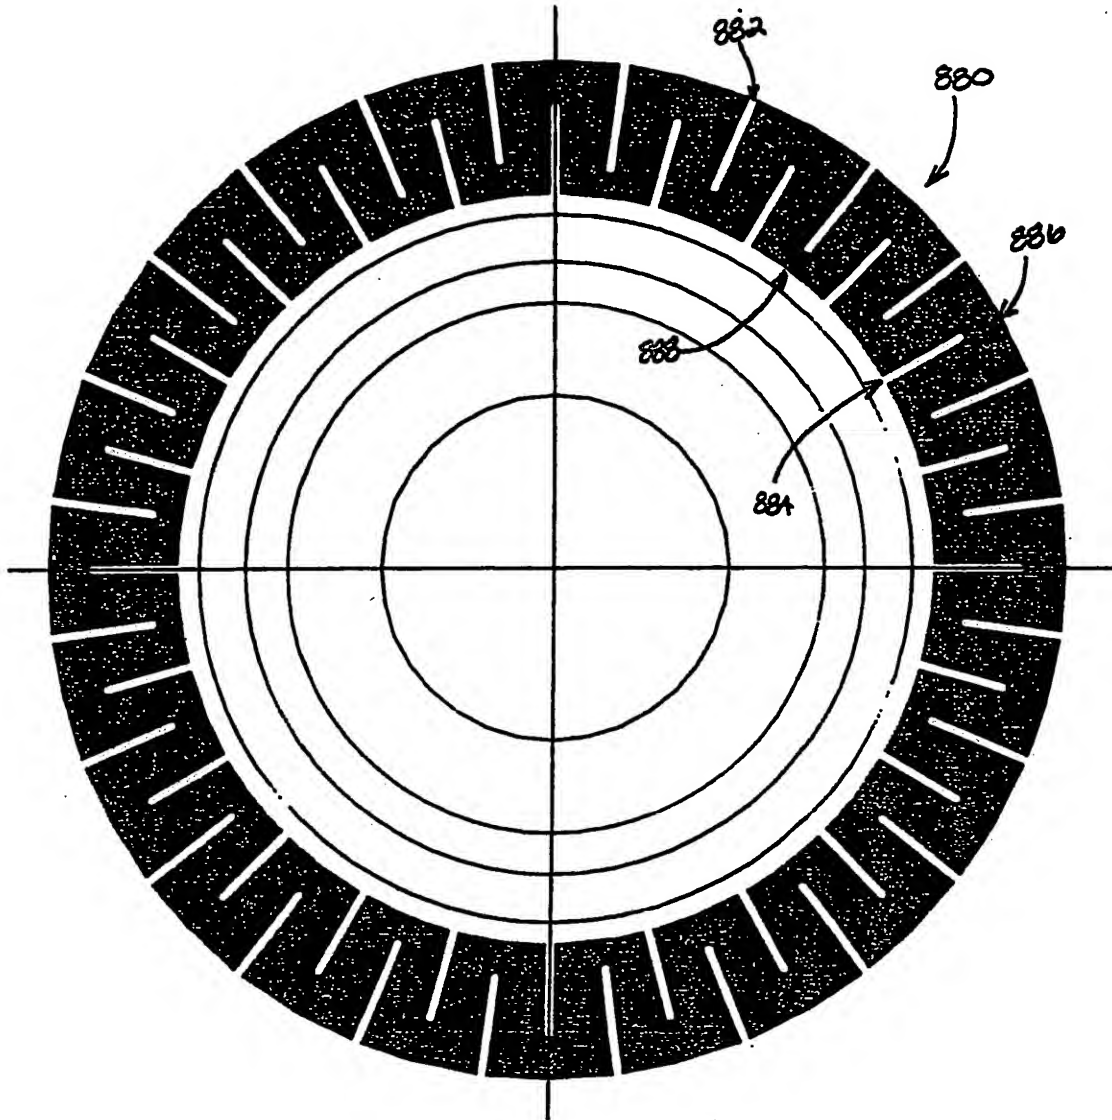


Fig. 20